


HDL Ball Check Valves



AVK

HDL[®]

Hillen de Lelie Ball Check Valves

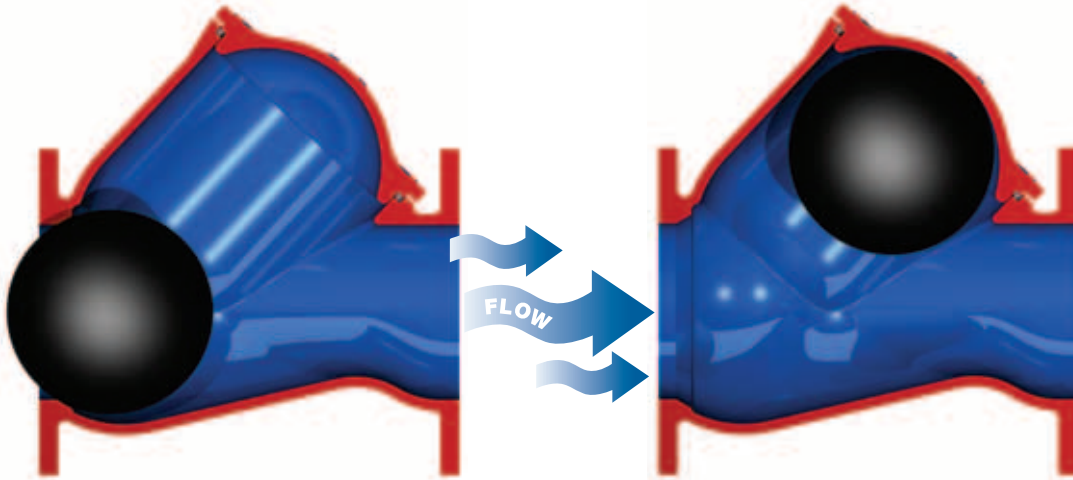


- Ball moves completely out of the flow path for low head loss
- Random seating of the ball on closing, ensuring long-life
- Valves can be installed horizontally or vertically
- Vertical installations can have downward flow when a floating ball is used

Nitrile (NBR) and
Polyurethane (PUR)
balls available

Sinking and floating balls
available for different
installation configurations

All ductile-iron
construction

Flange to flange
dimensions are to
ANSI/ASME B16.10

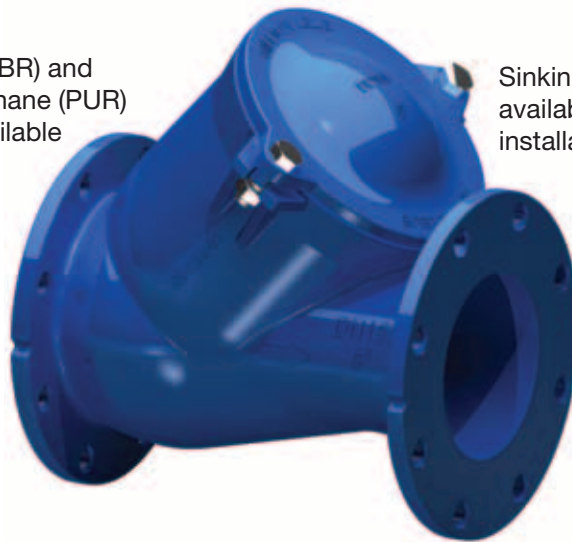

- Size Range
Flanged: 1 ½-inch to 24-inch
NPT: 1 ½-inch and 2-inch
- Pressure rated to 150 psi
- Simple bolt on cover for easy inspection and maintenance
- Flanges comply with ANSI/ASME B16.1 Class 125
- 100% testing — All valves tested to 150 PSI leak test/225 PSI hydrostatic shell test

NPT versions available in
ductile-iron or
stainless steel



North American Sales Headquarters

2810 Hampton Glen Ct
Matthews, NC 28105
Tel: (704) 845-0847
Fax: (704) 844-0137
Email: rick@gpmpumps.com

Distribution Center

6256 N. Telegraph Rd
Dearborn Heights, MI 48127
Tel: (313) 278-7867
Fax: (313) 278-6812
Email: rick@gpmpumps.com

