



highDRO water tanks

fire protection water tanks

HT-1129

PRODUCT DETAILS

HighDRO® Fire Protection Tanks (HD-FPT) are atmospheric water storage tanks specifically designed for use in a residential, commercial or institutional building's fire protection system. A properly sized HD-FPT will make a valuable contribution during firefighting emergencies, especially when firefighting demands more water than the building's domestic water feed line can supply.

All components comply with the relevant standards to ensure that the system will provide years of reliable service.

Specifically, they are designed, fabricated, tested, inspected and installed in accordance with the National Fire Protection Association NFPA Standard No. 22, "Water Tanks for Private Fire Protection."

Pre-engineered components such as Victaulic® fittings, external water stops, tank sumps, pump station mounts and anti-vortex devices are usually supplied with the tank. NSF, AWWA or UL compliant protective coatings are factory applied and form a hard, inert barrier for both the interior and exterior surfaces of the tank to prevent corrosion.

HD-FPT are often required by local fire codes to provide a dedicated source of firefighting water for rural, suburban and urban communities.

Water distribution system requirements from local municipalities can be unattainable or prohibitive due to extensive development. In this case, water must be stored and available in sufficient quantity to satisfy the fire sprinkler pump demand. It is more common for HD-FPT to be required by fire codes as secondary water supply for use with a building's sprinkler systems for fire suppression.

**Orientation:**

Vertical or Horizontal

Installation:

- Aboveground or Underground

Volumes:

- 185 to 57,500 gallons; multiple HighDRO[®] Tanks may be interconnected to increase storage volume above 60,000 gallons

Diameter:

- 3'-2" to 14'-0"

Length:

- Up to 90'-0"

Maximum Weight:

- 80 Tons

Material:

- Carbon Steel

Head Design:

- Flat are standard
- Flanged and dished, or cone (vertical only) also available

Penetrations:

- Threaded full couplings - up to 4" diameter
- Flanged fittings - 1/2" and up
- Manways - 24" minimum, 30", 36" diameter and custom rectangular manways

Surface Preparation:

- SSPC SP-6, SP-10, SP-5

Internal Linings:

- Epoxy Phenolic
- High-solids Epoxy
- High-solids Polyurethane
- Zinc-Epoxy
- Vinyl Ester
- Rubber, PVC and other sheet linings

External Coatings:

- Primer Paint
- High-solids Epoxy/Polyurethane Finish Paint. Standard color -white. Custom colors available

External Corrosion**Protection System:**

- HighGuard

Testing:

- 5-psi factory air test and seam inspection

Tank Support Systems:

- Horizontal - UL Saddles
- Vertical - Ring Bases & Angle Legs

Tank Accessories:

- Interior ladders
- Waterstops
- Vents
- Exterior ladders w/ OSHA cages & guard-rails; stairs, walkways, catwalks
- All necessary appurtenances per AWWA D100 and NFPA 22
- Water/wastewater pumps and controls
- Gauges


To ensure maximum longevity and optimum use, our corrosion protection systems for underground water tanks comply with UL-1746. Aboveground tanks can be protected with a wide selection of primers and topcoats, even those complying with ANSI/ AWWA D102, "Coating Steel Water-Storage Tanks."

These pre-engineered models satisfy the requirements most often specified by engineers. Our ability to custom fabricate tanks for many applications is second to none.


Highland's underground fire protection tanks are the perfect solution for developers and municipalities when you want your fire-fighting water containment out of sight and out of mind.

Please contact us for assistance with your special fit or function fire protection storage needs.


Model HD-FPT-BD - With a bottom drain connection for either a vertical pump wet well or fire pump suction. This FPT maintains a secure dedicated water supply for a building's overhead fire sprinkler or fire hoses.

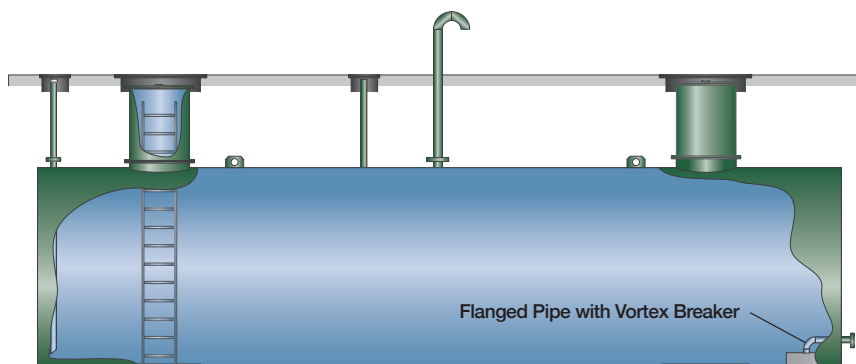


Model HD-FPT-PW - With a pump well for a vertical turbine fire pump. With this type of FPT, the fire pump impellers are fully immersed in the water, maintaining prime at all times.

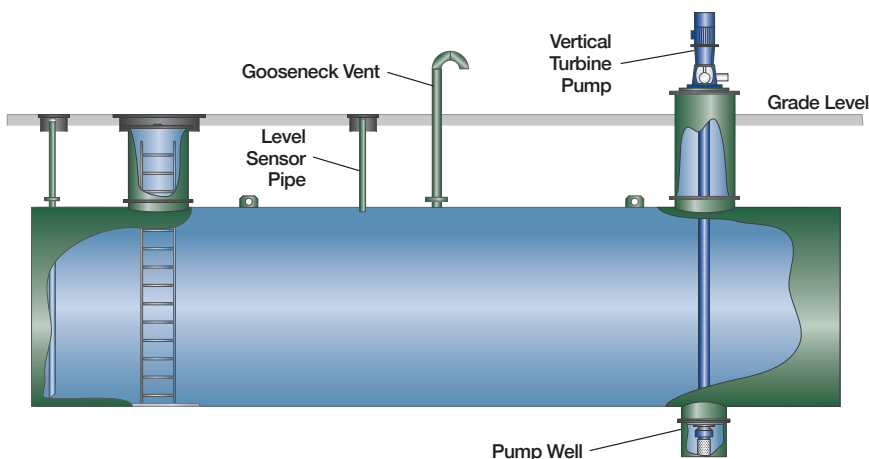

Model HD-FPT-VS - With a vertical suction pipe for use as an underground cistern to supply fire flow for fire department apparatus in a rural area.

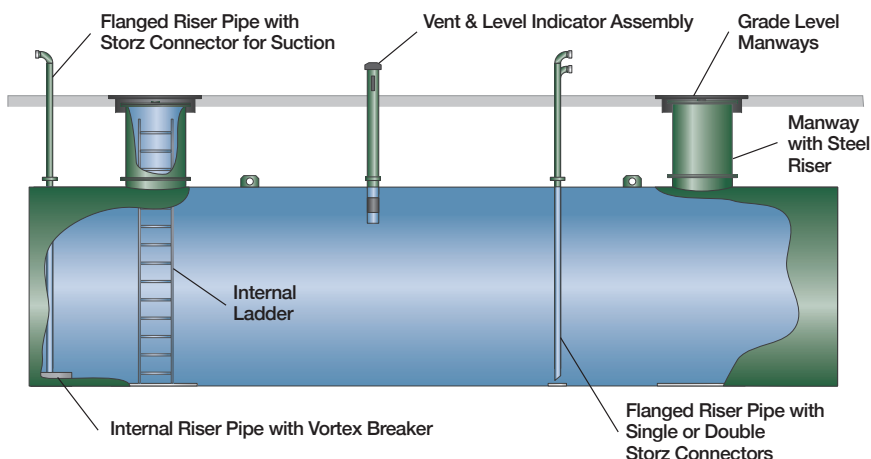

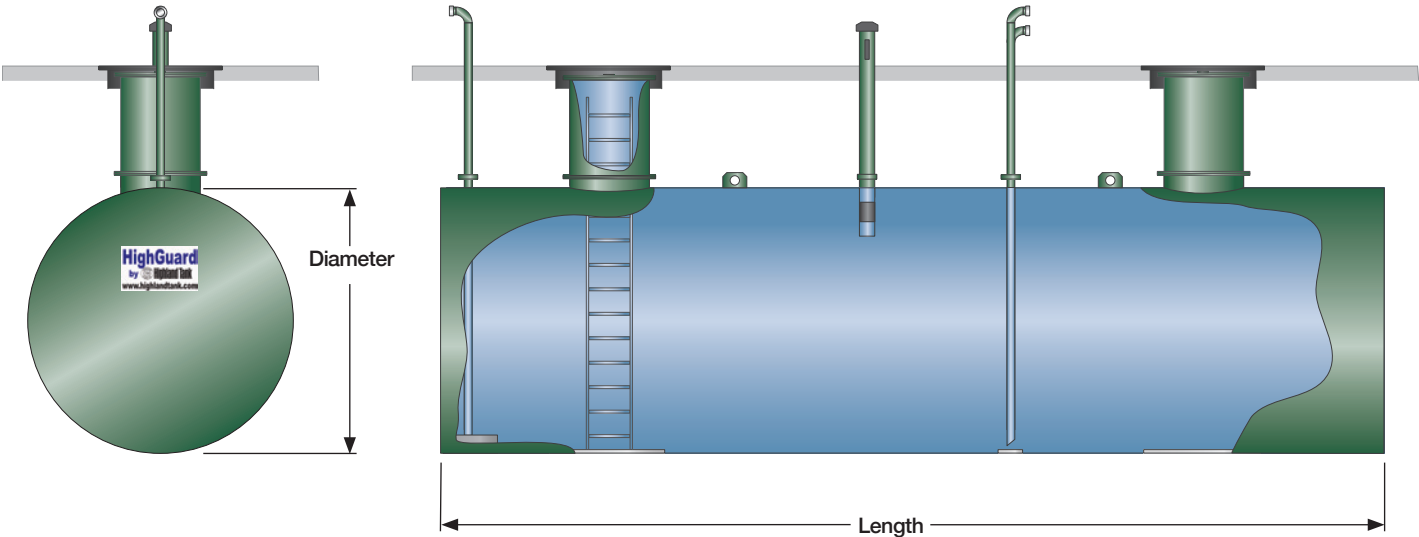

Volume Gallons	Dimensions	
	Diameter	Height
5,000	6'-0"	23'-10"
5,000	8'-0"	13'-4"
10,000	10'-0"	17'-0"
10,000	8'-0"	26'-8"
15,000	10'-0"	25'-6"
15,000	8'-0"	40'-0"
20,000	10'-0"	34'-0"
20,000	10'-6"	31'-0"
25,000	10'-0"	42'-6"
25,000	10'-6"	38'-9"
30,000	10'-0"	51'-2"
30,000	10'-6"	46'-6"
40,000	12'-0"	47'-6"
50,000	12'-0"	59'-6"
50,000	12'-6"	54'-6"
60,000	12'-0"	71'-0"
60,000	12'-6"	65'-5"
60,000	13'-0"	60'-6"

Custom sizes and configurations are available to suite you site needs.

Highland Tank's HighDRO® Fire Protection tank drawings are available for viewing or downloading in PDF or AutoCAD DXF format at highlandtank.com


HD-FPT are often required by local fire codes to provide a dedicated source of firefighting water for rural, suburban and urban communities.

Water distribution system requirements from local municipalities can be unattainable or prohibitive due to extensive development. In this case, water must be stored and available in sufficient quantity to satisfy the fire sprinkler pump demand. It is more common for HD-FPT to be required by fire codes as secondary water supply for use with a building's sprinkler systems for fire suppression.

When installed underground, these NFPA-22 compliant tanks store an emergency supply of water being available in the event of fire.

They provide an unseen protection for the residents, save valuable space, reduce visual obstruction and are easily accessible for fire and municipal vehicles.

Building and fire codes may require a secondary, on-site water supply for high-rise buildings. Compliance may result in a secondary water supply equal to the hydraulically calculated sprinkler and hose stream design demand with a required duration time up to 30 minutes.

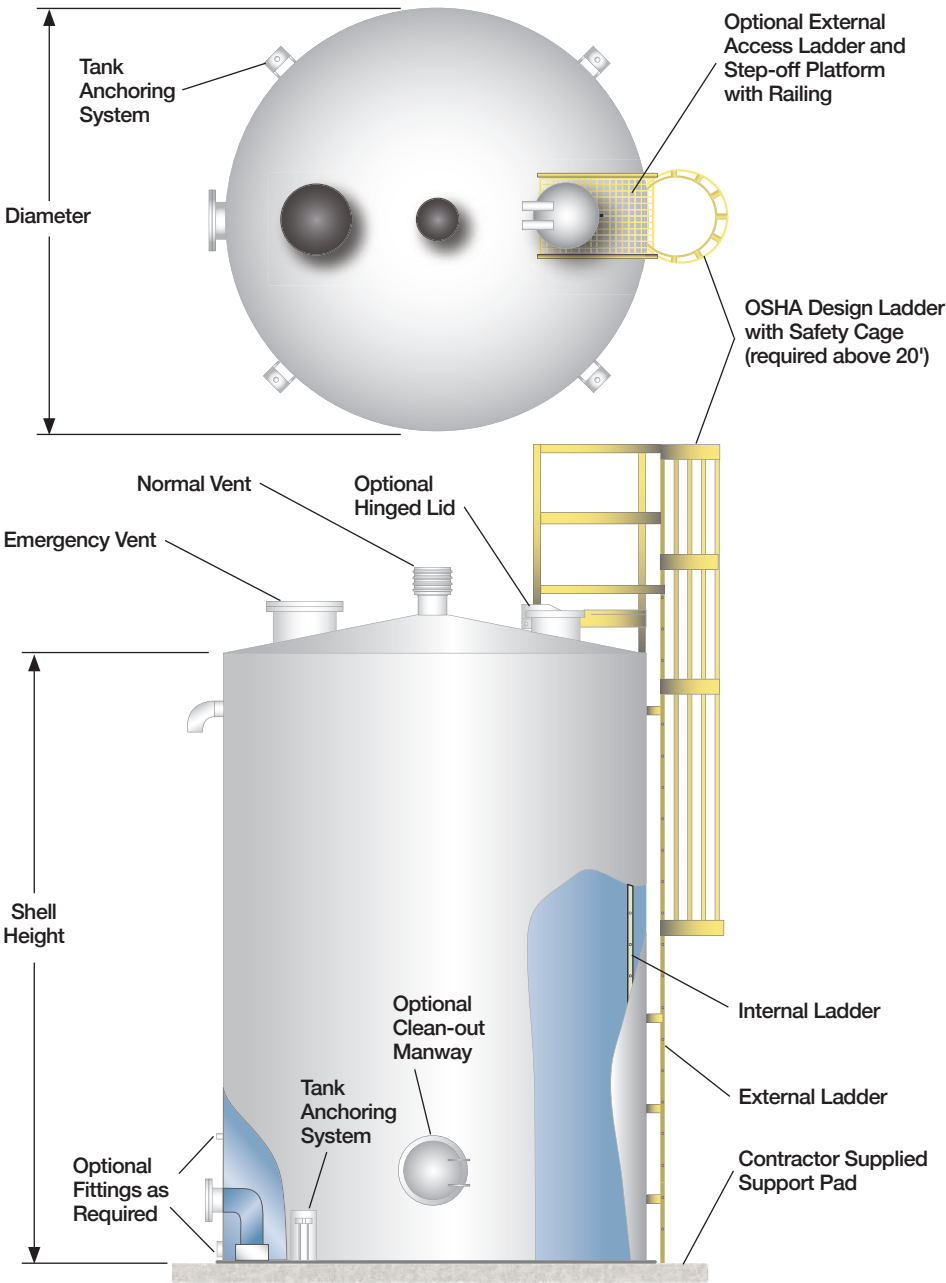

Volume Gallons	Dimensions	
	Diameter	Height
5,000	8'-0"	13'-4"
10,000	10'-0"	17'-0"
15,000	10'-0"	25'-6"
20,000	10'-0"	34'-0"
20,000	10'-6"	31'-0"
25,000	12'-0"	29'-8"
30,000	12'-0"	35'-6"
30,000	12'-6"	32'-9"
40,000	12'-0"	47'-6"
40,000	12'-6"	43'-8"
40,000	13'-0"	40'-4"
50,000	13'-0"	50'-6"
60,000	14'-0"	52'-3"


Custom sizes and configurations are available to suite you site needs.




Vertical Tank Bottoms




Flat - the most commonly used tanks in the industry; requires a flat surface to give full support.

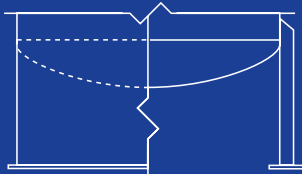

Dish with Ring Base or Angle Legs - offers near complete drainage; used when head pressure is required at the output.

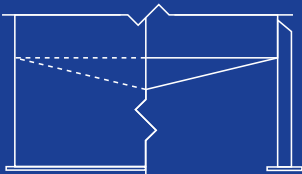

Cone with Ring Base or Angle Legs - offers complete drainage.

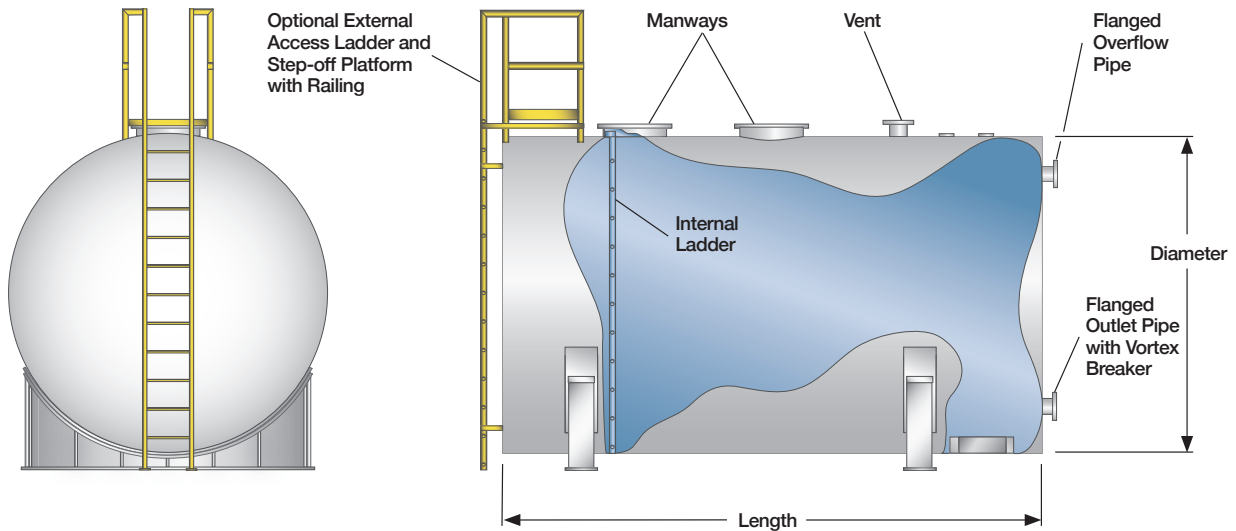

Volume Gallons	Dimensions	
	Diameter	Height
5,000	6'-0"	23'-10"
5,000	8'-0"	13'-4"
10,000	10'-0"	17'-0"
10,000	8'-0"	26'-8"
15,000	10'-0"	25'-6"
15,000	8'-0"	40'-0"
20,000	10'-0"	34'-0"
20,000	10'-6"	31'-0"
25,000	10'-0"	32'-6"
25,000	10'-6"	38'-9"
30,000	10'-0"	51'-2"
30,000	10'-6"	46'-6"
40,000	12'-0"	47'-6"
50,000	12'-0"	59'-6"
50,000	12'-6"	54'-6"
60,000	12'-0"	71'-0"
60,000	12'-6"	65'-5"
60,000	13'-0"	60'-6"

Custom sizes and configurations are available to suite your site needs.



Highland Tank's HighDRO® Fire Protection tank drawings are available for viewing or downloading in PDF or AutoCAD DXF format at highlandtank.com



Highland Tank®

Stoystown, PA
One Highland Road
Stoystown, PA 15563-0338
814.893.5701

Manheim, PA
4535 Elizabethtown Road
Manheim, PA 17545-9410
717.664.0600

Watervliet, NY
958 19th Street
Watervliet, NY 12189-1752
518.273.0801

Greensboro, NC
2700 Patterson Street
Greensboro, NC 27407-2317
336.218.0801

Lebanon, PA
2225 Chestnut Street
Lebanon, PA 17042-2504
717.664.0602

Friedens, PA
1510 Stoystown Road
Friedens, PA 15541-7402
814.443.6800

Clarkston, MI
4701 White Lake Road
Clarkston, MI 48346-2554
248.625.8700

Mancelona, MI
9517 Lake Street
Mancelona, MI 49659-7968
231.587.8412



PROUDLY MADE IN AMERICA

© Highland Tank - HT-1129 - 01/2019